


CPU-162-23

- HPEC and Microserver Ready
- Intel® Xeon® D-1500
- Up to 64GB ECC RAM
- Two 10Gb Ethernet
- Rugged and Fanless
- Customizable
- Professional Services

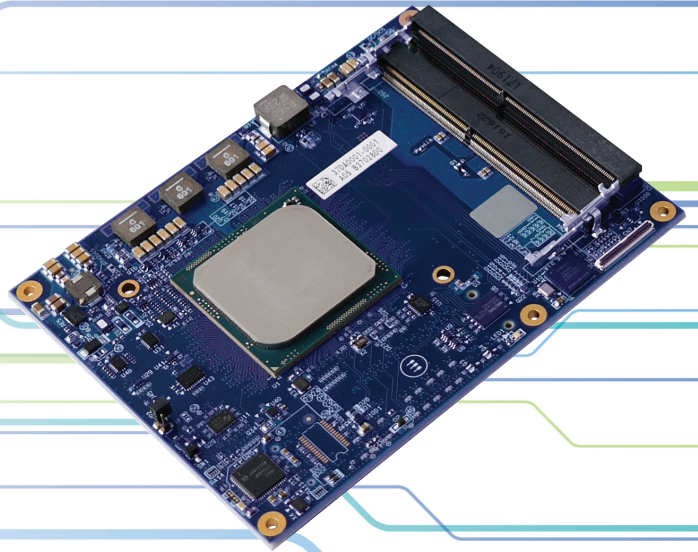

FEATURES

HPeC and Microserver Ready - Combines up to 16 cores with a rugged design to enable High Performance applications even in the field

Powerful - Supports the latest generation of embedded Intel Pentium and Xeon D-1500 CPUs to deliver a server-class module

Up to 64GB ECC RAM - Supports up to four SO-DIMM sockets for ECC and non-ECC memory, to allow server-class applications

Two 10Gb Ethernet - Complies with COM Express Rev 3.0 Type 7, providing high speed interfaces such as two 10GbEthernet ports and up to x32 PCIe lanes

Rugged and Fanless - Operates from - 40 to +85°C, with error correcting code memory and low power variants for fanless design

Customizable - Comes with optional personalization and full customization services, ranging from factory options to deep HW/SW configuration changes

Professional Services - Provides the foundation for Eurotech Professional Services that span from carrier board development to complete system design, certification and manufacturing

The CPU-162-23 brings the computational performance and RAM capacity of a server to the field. It supports extended temperature range (-40 to +85°C) and ECC memory to operate reliably in industrial and rugged applications.

The CPU-162-23 can be configured with any member of the Xeon/Pentium D-1500 family, ranging from 4 to 16 cores and is available with up to four SO-DIMM sockets for a total of 64GB DDR4 with or without ECC.

The CPU-162-23 is a headless module with a Basic form factor (125x95mm) that is fully compliant with the COM Express Type 7 pinout, delivering very high speed interfaces, like up to x32 PCIe lanes, two 10Gbps (10GBASE-KR) and one 10/100/1000Mbps Ethernet port (1000BASE-T). Other interfaces include two SATA 3.0 ports, four USB 3.0 and four USB 2.0 ports.

Supported operating systems include Yocto Linux and CentOS; moreover, the CPU-162-23 supports Everyware Software Framework (ESF), a commercial, enterprise-ready edition of Eclipse Kura, the open source Java/OSGi middleware for IoT Edge Gateways.

Professional Services are available for the CPU-162-23, starting from BIOS personalization and include carrier board design, system development and production. Deep module customization, such as feature changes are also available.

CPU-162-23

COM Express Basic Type 7 Rugged Intel Xeon D

Specifications

Ordering code: CPU-162-23-XX

XX		-05	-07	-08	-09	-10
PROCESSOR	CPU	Pentium D1519 – 1.50GHz, 4 Cores	Xeon D-1539 – 1.60GHz, 8 Cores	Xeon D-1559 – 1.50GHz, 12 Cores	Xeon D-1567 – 2.10GHz, 12 Cores	Xeon D-1577 – 1.30GHz, 16 Cores
MEMORY	RAM	3x DDR4-ECC SODIMM for up to 48GB (Factory Option: up to 4x DDR4 ECC SODIMM for up to 64GB)				
STORAGE	Embedded	16MB SPI BIOS				
	SATA	2x SATA 3.0 (up to 6Gb/s)				
I/O INTERFACES	Ethernet	2x 10Gbps, 1x 10/100/1000Mbps				
	10Gb Ethernet	4x USB 3.0, 4x USB 2.0				
	USB	2x UART (TX/RX)				
	Serial	1x 8bit Digital I/O				
	Digital I/O	1x PCIe x16 (Gen 3), 1x PCIe x8 (Gen 3), 1x PCIe x4 (Gen 2), 1x PCIe x2 (Gen 2), 1x PCIe x1 (Gen 2) Factory Option: 1x PCIe x1 (Gen 2) with Gb Ethernet Disabled Non-transparent Bridge or Transparent bridge (BIOS Selectable)				
	PCI Express	Yes				
	LPC	Yes				
	I2C	Yes				
	SPI	Yes				
	SMBus	Yes, Dedicated Chip				
	OTHER	RTC	Temperature			
Watchdog		12V, 5VSBY, 3V_RTC				
Sensors		Temperature				
POWER	Input	12V, 5VSBY, 3V_RTC				
	Consumption	25W (CPU TDP)	35W (CPU TDP)	45W (CPU TDP)	65W (CPU TDP)	45W (CPU TDP)
ENVIRONMENT	Operating Temp	-40 to +85°C			0 to +70°C	
	Storage Temp	-40 to +85°C				
	Humidity	35% to 85%				
CERTIFICATIONS	Regulatory §	CE, FCC, ISED				
	Safety §	EN 62368, UL 60950				
	Environmental	RoHS2, REACH				
	Compliance	PICMG COM Express R3.0, Type 7				
MECHANICAL	Dimensions	125x95mm (LxW) - COM Express Basic				

SUPPORTED SOFTWARE

OS	Eurotech Everyware Linux, CentOS 7 (Professional Services: Windows 10 IoT Enterprise, Fedora, Other Linux and RTOS)
IoT Framework	Everyware Software Framework (Java/OSGi)

Note: The information in this document is subject to change without notice and should not be construed as a commitment by EUROTECH. While reasonable precautions have been taken, EUROTECH assumes no responsibility for any error that may appear in this document. All trademarks or registered trademarks are the properties of their respective companies. *Designed to meet.